




TYPE		DIMENSION DRAWING				No.		No.						
Submersible sewage pump						MODEL		300WQ800-20-75						
		A	A1	A2	A3	A4	D	D1	H1	H2	H	H1	H2	POWER WEIGHT
300WQ800-20-75		345	924	300	623	788	725	400	1470	3700	1555	2555	220	1120kg
300WQ800-20-75		4	11	12	13	14	15	16	17	18	19	20	21	22
		300	400	400	400	500	500	600	600	2.5	725x14	90	45	3500
		470	630	630	630	725	725	810	810	35				

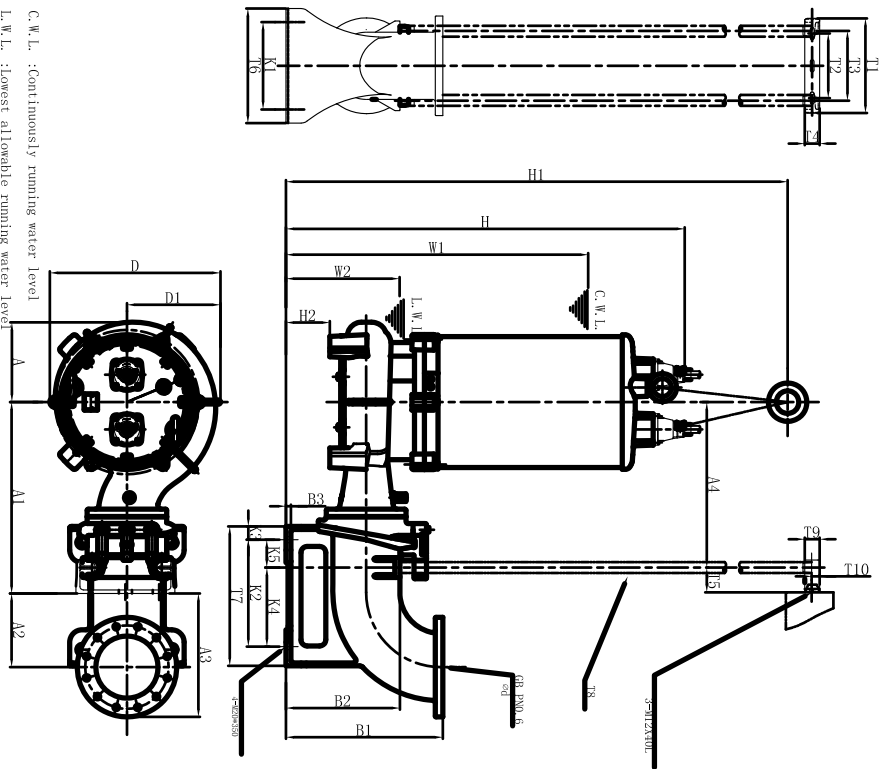

NANFANG PUMP INDUSTRY CO., LTD.

unit: mm

No. 图号		P U M P P E R F O R M A N C E C U R V E S	
TYPE Submersible sewage pump		MODEL WQ800-20-75(4p)	FREQUENCY 50 Hz
CUSTOMER'S NAME			
EQUIPMENT TITLE		No.	
STANDARD SPECIFICATIONS		HEAD SPECIFICATIONS	
DISCHARGE PORE	300	mm	
TOTAL HEAD	20	m	
CAPACITY	800	m ³ /h	
MOTOR OUTPUT	75	kW	
PHASE X VOLTAGE	3 Ø 380 V	Ø V	
CURRENT	142	A	
POLES	4 P /	min P / min -1	
STARTING METHOD	Y-Δ start		
INSULATION CLASS	F		

60 50 40 30 20 10 0	200 400 600 800 1000 1200	m ³ /h m m kW V A
100- 90- 80- 70- 60- 50- 40- 30- 20- 10- 0-	200 400 600 800 1000 1200	m ³ /h m m kW V A

Total Head
 Total Eff
 output

Nantang Zhongjin Environment CO., LTD.